Wall or Ceiling Mounting Instructions

Refer to the Figure and Table below for the following steps:


- 1. Attach the U-bracket (A) to the wall or ceiling using fasteners that are suitable for the wall or ceiling material (not supplied).
- 2. Remove the paper backing from the friction pads (C) and attach these to the U-bracket as shown.
- 3. Remove the two 3/8-16 bolts from each end of the enclosure.
- 4. Ensuring that the washer (B) is mounted between the U-bracket and the 3/8-16 screw(s) previously removed from the enclosure, mount the Xi-1082 to the U-bracket by selecting two of the six avaliable mounting holes on the bracket.
- 5. Rotate the speaker so that the input terminal is accessible and attach the wires. Position the speaker for the desired angle and tighten the screws sufficiently so that the speaker does not inadvertently rotate.



CAUTION:

Due to the weight of the Xi-1082 speaker system, it is imperative that the Xi-1082 bracket be properly secured to the wall or ceiling. The choice of fastener (not provided with bracket kit) will be determined by the material and construction of the mounting surface.

Item	Qty.	Part No.	Description
А	1	74120-JF/JH	U-Bracket Blk/Wht
В	2	4053	Washers
С	2	38020	Friction Pads

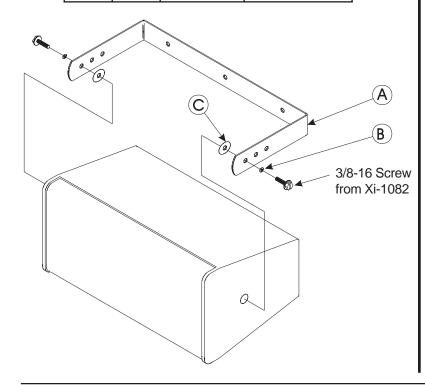

Specifications		
Wall/Ceiling Mounting Holes:	Three in-line, 0.40" (10mm) diameter clearance holes, centers spaced 6.8" (173mm) apart	
Enclosure Mounting Holes:	Six 0.40" (10mm) diameter clearance holes on the ends of the bracket	
Material:	Hot-rolled steel	
Finish:	Black or White powder coat	
Parts Supplied (see table above):	U-bracket, (2) Friction pads, (2) Washers	
Net Weight:	2.25 lbs (1.02 kg)	
Shipping Weight:	3.25 lbs (1.47 kg)	
Part Numbers:	7003244 (BLK) 7003402 (WHT)	



12000 Portland Avenue South, Burnsville, MN 55337 Phone:952/884-4051, Fax:952/884-0043

www.electrovoice.com

© Telex Communications, Inc. 7/2003 Part Number 535431 Rev B

U.S.A. and Canada only. For customer orders, contact Customer Service at:

800/392-3497 Fax: 800/955-6831

Europe, Africa, and Middle East only. For customer orders, contact Customer Service at: + 49 9421-706 0 Fax: + 49 9421-706 265

Other International locations. For customer orders, contact Customer Service at: + 1 952 884-4051 Fax: + 1 952 736-4212

For warranty repair or service information, contact the Service Repair department at: 800/685-2606