

**University
Sound
Inc.**

Model 428 Touch-To-Talk Microphone Stand

SPECIFICATIONS

Material:

Die-cast zinc and plastic

Finish:

Non-reflecting gray

Dimensions:

177.8 mm (7.0 in.) high,
130.2 mm (5.13 in.) base diameter

Weight:

0.8 kg (1.75 lbs)

DESCRIPTION

The Electro-Voice Model 428 microphone stand fits any standard microphone mount having $\frac{5}{8}$ " -27 threads. The switch, a double-pole, double-throw blade type, is actuated by a lever. A locking button permits steady operation over long time intervals

without steady thumb pressure. Switch terminals are made accessible for soldering by removing the protective aluminum shield. The stand is finished in non-reflecting gray, and the lever, of durable high-impact plastic, is also gray.

WIRING

The switching of the Model 428 provides for control of the microphone circuit itself, as well as for external relay-operated equipment. A typical arrangement is shown in Figure 2.

The microphone is normally shorted when wired as shown in Figure 2. When the switch is depressed, contacts are opened to permit operation of the microphone. When multiple microphones are used with the same

amplifier input, the shorting connections on one microphone will short the others, as well. The switch should, therefore, be wired so that the contacts complete the microphone circuit instead of breaking the ground connection.

The other contacts actuate external relay equipment when the switch is depressed. Both make and break contacts are available. If the switch is used to break into an inductive circuit carrying substantial power, care should be taken to bypass the circuit at its source to prevent arcing.

Specifications subject to change without notice.

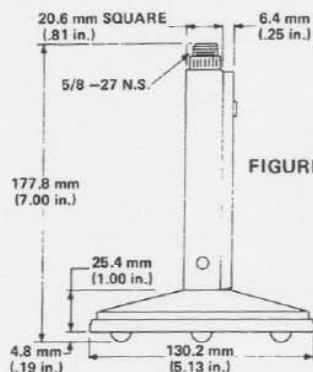


FIGURE 1 - Dimensions

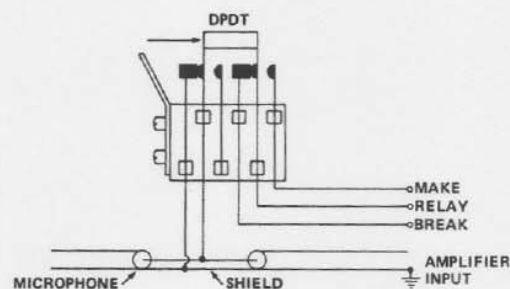


FIGURE 2 - Wiring Diagram

MANUFACTURED IN THE U.S.A.



**University
Sound Inc.**
a MARK IV company
**COMMERCIAL
SOUND
PRODUCTS**

13278 Ralston Avenue
Sylmar, CA 91342-7607
FAX (818) 362-3463
Phone (818) 362-9516