



DESCRIPTION AND APPLICATIONS

The Electro-Voice Model 342 stud-mount/adapter converts any 3/4-inch diameter microphone, with A3F connector, for stud-mount use with integral on/off switch. Performers have a switch at the mike, accidental separation of microphone from stand is eliminated, and theft is discouraged.

Plug a microphone directly into the standard broadcast connector of the adapter and secure it in place by tightening the headless recessed hex screw at the base of the mounting tube. A metal shoe holds the microphone securely in place (See Figure 2). The mike and 342 accessory stud-mount are locked into a solid unit so long as the screw is set.

The stud-adapter may be threaded onto a standard 5/8"-27 microphone stand in the normal manner. Plug the mike cable into the adapter which accepts any standard 3-pin broadcast style connector.

SPECIFICATIONS

Dimensions:	4.1" (104.1mm) x 1.7" (43.2mm) x 1.63" (41.4mm)
Weight:	8.64 ounces (245g)
Material:	Pressure cast zinc
Connector:	Switchcraft A3M insert
Switch:	Shorts pins 2 & 3
Locking Device:	Hex screw/pressure shoe

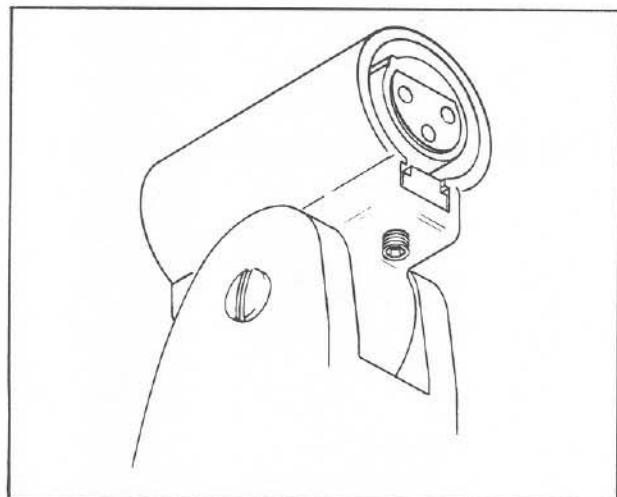


FIGURE 1 — View of Locking Assembly

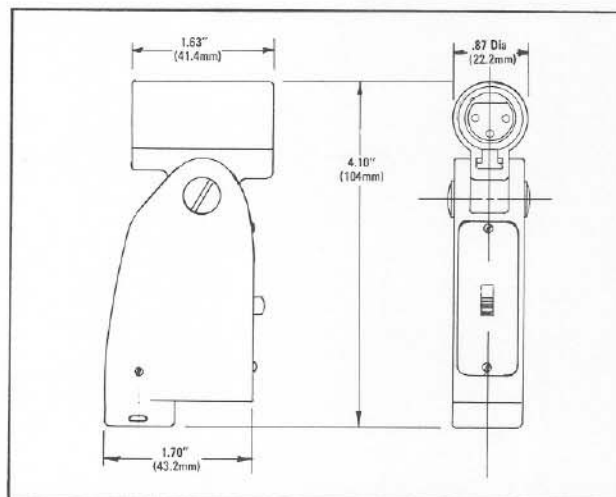


FIGURE 2 — Dimensions