
EVH-1152D/43




- Rotatable High Frequency Waveguide
- Integrated Passive Network with PTP High Frequency Protection
- PI and FG versions available with gland nut and stainless-steel grille rated IEC 60529 IP55
- Integrates easily with EVF Low Frequency and Subwoofer Systems
- EN54-24 type B certification 1438/CPR/0299 with CDG cover installed (Only available in select regions)



For high frequencies, the EVH-1152D/43 utilizes the DH7N, a high-output 3-inch titanium compression driver, coupled to a rotatable Constant Directivity 40° x 30° waveguide. Both the mid-bass and high frequency waveguides may be rotated to maintain uniform pattern control over the entire critical vocal range regardless of enclosure orientation. For low frequencies, the SMX2151 15-inch woofer was developed using FEA optimization for motor, suspension, and electrical design to ensure very low distortion, high efficiency, and maximum intelligibility at high SPL. The crossover uses steep, 24-dB per-octave slopes with equalization for very

smooth response in the vocal range, linear off-axis response, and an HF protection circuit for long-term reliability. This combination of technologies results in extended frequency response and excellent pattern control down to 500 Hz.

The EVH-1152D/43 features make it ideal for many fixed-install applications. The trapezoidal enclosure is constructed out of weather-resistant birch and coated with EVCoat for enhanced durability. For protection against outdoor elements, weatherized versions are available (PI and FG). The enclosure is built with 28

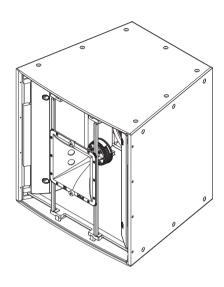

M10 suspension points for single hang (four (4) shoulder eyebolts included) or cluster arrays (optional HRK or VRK kits).

The innovative input panel provides Phoenix-style connectors (included in all models) and a dual gland nut cover plate (CDG included in PI and FG models). For convenience in temporary installation you may add a dual NL4 type connector cover plate (CDNL4). An external easy to access jumper card is provided with each loudspeaker to assist you in the selection of passive (standard shipping configuration) or biamp operation. An available 70.7/100 Volt internal transformer kit (TK-150) may be easily mounted to the input panel for use in distributed systems. No matter what the application and budget, all these features provide you with the tools to increase flexibility during system design to meet and support your customer's requirements with fewer items in

EVF and EVH loudspeakers feature precise acoustics and rigging design for easy to configure vertical and horizontal clusters as part of the solutions provided in the EV innovation family.

Technical specifications


recillical sp	ecilicat	10113		
Freq. Response (-3 dB):	60 Hz-17 kHz	60 Hz-17 kHz ¹		
Freq. Range (-10 dB):	50 Hz-20 kHz ¹			
Rotatable Coverage:	40° x 30°			
Rec. High-Pass Frequency:	60 Hz			
Passive Crossover Freq.:	1300 Hz			
Axial Sensitivity:	106 dB (1 W/1 m) ¹			
Max. Calculated SPL:	139 dB¹			
Passive Power Handling:	500 W Continuous, 2000 W Peak ²			
Impedance:	8 Ω (nominal), 6.0 Ω (min)			
Transformer: Standard 50 Hz BW24 High Pass	70 V	100 V	Z nom	
	37.5 W	75 W	130 Ω	
	75 W	150 W	65 Ω	
	150 W	Do Not Use	33 Ω	
Transformer: 89 Hz High Pass per EN54-24 Spectrum	70 V	100 V	Z nom	
	50 W	100 W	100 Ω	
	100 W	200 W	50 Ω	
	200 W	400 W	25 Ω	
LF Transducer	- SMX2151, 15 ir	(381 mm) driv	er	
LF Axial Sensitivity:	107 dB (1 W/1 m) ⁴			
LF Max. Calculated SPL:	139 dB			
LF Power Handling:	400 W Continuous, 1600 W Peak ³			
LF Impedance:	8Ω (nominal), 6.1Ω (min)			
HF Transducer - DH7N,	3 in (76 mm) diap	hragm compres	sion driver	
HF Axial Sensitivity:	114 dB (1 W/1 m) ⁴			
HF Max. Calculated SPL:	139 dB			
HF Power Handling:	75 W Continuous, 300 W Peak ³			
HF Impedance:	8Ω (nominal), 6.0Ω (min.)			
Connectors:	Dual 4-pin 10 AWG Phoenix/ Euro Block scr terminals	CDG du	ersions - al-gland-nut anel cover d	
Enclosure:	13-ply weathe resistant birch with EVCoat	weathe	FG Version - 13-ply weather-resistant birch with fiberglass finish	
Grille:	16 GA powder coated galvanr with rotatable logo	neal Stainles	ersions - ss steel with hobic cloth	
Environmental:	IEC 60529 IP55 for PI and FG versions			
	coated galvanr with rotatable logo	neal Stainles hydrop	ss steel v hobic clo	

Suspension:	(28) M10 threaded suspension points	
Dimensions (HxWxD):	30.26 in x 30.26 in x 26.77 in (768.6 mm x 768.6 mm x 680.1 mm)	
Net Weight:	145.5 lb (66.1 kg)	
Shipping Weight	160.5 lb (72.9 kg)	

- 1. Half-space measurement.
- 2. EIA RS-426A, tested for eight hours.
- 3. AES 2-1984, tested for eight hours.
- 4. Arithmetic averages, 300–1,300 Hz (LF) and 1,300–5,000 Hz (HF).


System overview

Block Diagram (Biamp):

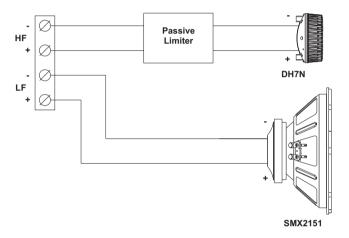


Block Diagram (Passive):


Standard shipping configuration

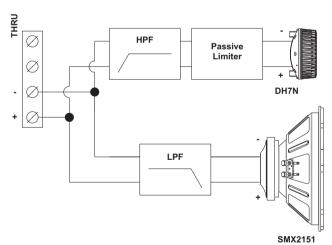


Frequency Response and Impedance:

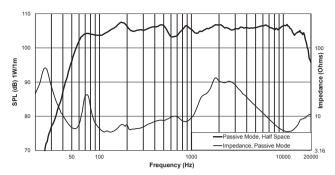

Horizontal Off-Axis Frequency Response (Passive):

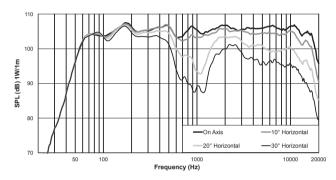


Vertical Off-Axis Frequency Response (Passive):

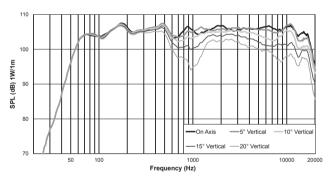


Caution!

This Electro-Voice loudspeaker should be suspended overhead only in accordance with the procedures and limitations specified. This system should be suspended with certified rigging hardware by an authorized rigging professional and in complete compliance with local, state, and federal overhead suspension ordinances.

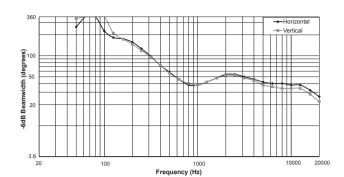

Directivity (Active):

Beamwidth (Active):

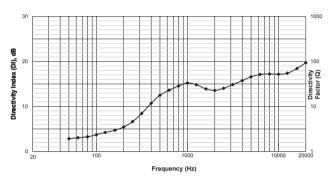



Notice!


Using EVH-1152D v.1.1 DSP standard IIR settings for the Beamwidth, Directivity and Polar Response.

Compatible System Solutions:		
EVH-1152D/64	60° x 40° Coverage	
EVH-1152D/66	60° x 60° Coverage	
EVH-1152D/94	90° x 40° Coverage	
EVH-1152D/96	90° x 60° Coverage	
EVH-1152D/99	90° x 90° Coverage	
EVF-2151D	Dual 15 inch Subwoofer	
EVF-1181S	Single 18 inch Subwoofer	
DX46	Dx46 Loudspeaker Controller ⁵	
N8000	N8000 Digital Matrix Controller ⁵	
CPS2.9	CPS2.9 Power Amplifier ⁵	
CPS2.12	CPS 2.12 Power Amplifier ⁵	
CPS4.10	CPS 4.10 Power Amplifier ⁵	


5. Contact your sales representative for available voltage versions.

Horizontal and Vertical Polar Response (Active):

Polar plots (1/3 octave)

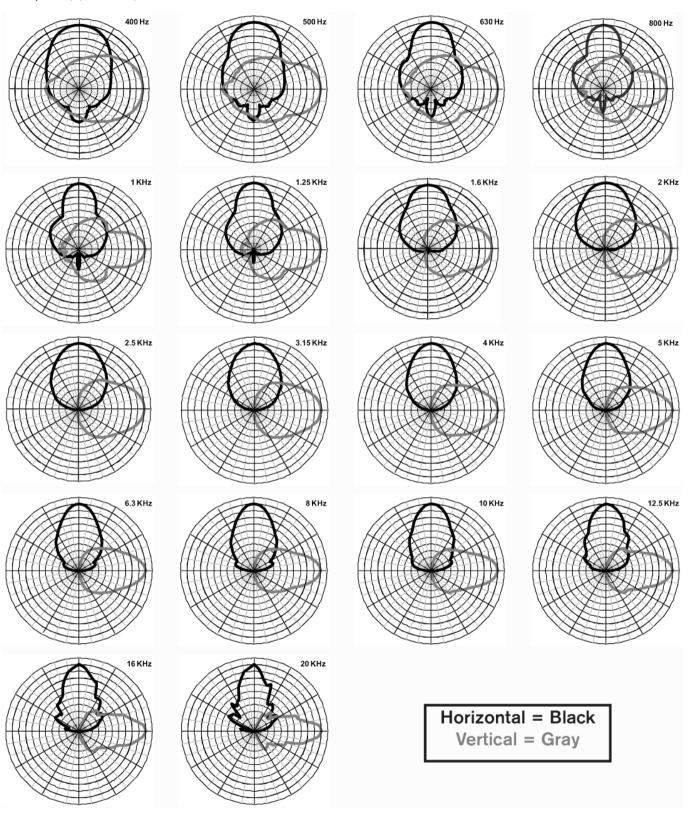

Dimmension Drawing:

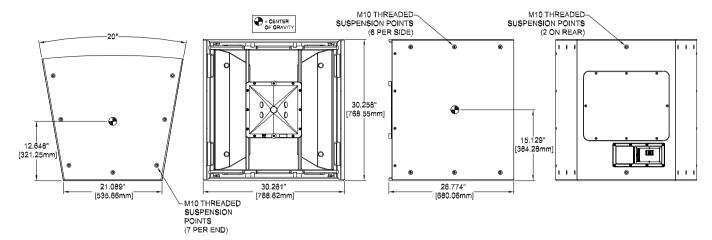



Notice!

Acoustic measurement reference axis is the center of the grille.

Certifications and approvals

EN54-24 type B certification 1438/CPR/0299 with CDG cover installed (Only available in select regions).

Ordering information

EVH-1152D/43-BLK

15" / 2-way Full-range Systems; SMX woofer & DH7N driver - 500 W cont.; 40° x 30°, EVCoat, black Order number EVH1152D43BLB

EVH-1152D/43-WHT

15" / 2-way Full-range Systems; SMX woofer & DH7N driver - 500 W cont.; 40° x 30°, EVCoat, white Order number EVH1152D43WLB

EVH-1152D/43-PIB

15" / 2-way Full-range Systems; SMX woofer & DH7N driver - 500 W cont.; 40° x 30°, Pl-weatherized, black Order number EVH1152D43PBLB

EVH-1152D/43-PIW

15" / 2-way Full-range Systems; SMX woofer & DH7N driver - 500 W cont.; 40° x 30°, Pl-weatherized, white Order number EVH1152D43PWLB

EVH-1152D/43-FGB

15" / 2-way Full-range Systems; SMX woofer & DH7N driver - 500 W cont.; 40° x 30°, Fiberglass, black Order number EVH1152D43-FBLB

EVH-1152D/43-FGW

15" / 2-way Full-range Systems; SMX woofer & DH7N driver - 500 W cont.; 40° x 30°, Fiberglass, white Order number **EVH1152D43-FWLB**

EVH-1152D/43-BLK

15" / 2-way Full-range Systems; SMX woofer & DH7N driver - 500 W cont.; 40° x 30°, EVCoat, black — EN54-24 certified

Order number EVH-1152D/43-BLKE

EVH-1152D/43-WHT

15" / 2-way Full-range Systems; SMX woofer & DH7N driver - 500 W cont.; 40° x 30°, EVCoat, white — EN54-24 certified

Order number EVH-1152D/43-WHTE

EVH-1152D/43-PIB

15" / 2-way Full-range Systems; SMX woofer & DH7N driver - 500 W cont.; 40° x 30°, Pl-weatherized, black — EN54-24 certified

Order number EVH-1152D/43-PIBE

EVH-1152D/43-PIW

15" / 2-way Full-range Systems; SMX woofer & DH7N driver - 500 W cont.; 40° x 30°, Pl-weatherized, white — EN54-24 certified

Order number EVH-1152D/43-PIWE

Accessories

CSG

Single gland nut cover kit for EVA, EVF & EVH Order number CSG-LB

CDG

Dual gland nut cover kit for EVA, EVF & EVH Order number **CDG-LB**

CDNL4

Dual NL4 cover kit for EVA, EVF & EVH Order number **CDNL4-LB**

TK-150

Transformer kit for EVF & EVH, 150W / 70V Order number **TK-150**

HRK-2B

Horizontal rigging kit for EVF & EVH full-range to EVF sub, black

Order number HRK-2B-LB

HRK-2W

Horizontal rigging kit for EVF & EVH full-range to EVF sub, white

Order number HRK-2W-LB

HRK-3B

Horizontal rigging kit for EVH, black Order number **HRK-3B-LB**

HRK-3W

Horizontal rigging kit for EVH, white Order number **HRK-3W-LB**

VRK-2B

Vertical rigging kit for EVF & EVH full-range to EVF subs, black

Order number VRK-2B-LB

VRK-2W

Vertical rigging kit for EVF & EVH full-range to EVF subs, white

Order number VRK-2W-LB

VRK-3B

Vertical rigging kit for EVH, black Order number **VRK-3B-LB**

VRK-3W

Vertical rigging kit for EVH, white Order number VRK-3W-LB

Represented by:

Germany:

Bosch Sicherheitssysteme GmbH Robert-Bosch-Ring 5 85630 Grasbrunn Germany Bosch Security Systems, Inc. 12000 Portland Avenue South Burnsville MN 55337

www.electrovoice.com