

RAYMER

MODEL 1835 AMPLIFIER

A multi-purpose High Fidelity Amplifier designed for use in background music, public address, and high fidelity systems. Two high gain inputs for microphone, with special switch on Mike 2 input for conversion to tape head or magnetic phonograph cartridge; one input for tuner, ceramic or crystal cartridge, or tape head with preamplifier. Individual controls for each input. Separate bass and treble controls. Pilot light. External fuse receptacle. Separate on-off power switch. Speaker Output Impedances: 4, 8, 16 ohms. Output Lines: 25 volts, 70 volts.

UNPACKING:

The unit is to be removed carefully from the carton and inspected for any possible damage in transit. If there is any evidence of any damage which might have occurred in shipment, notify your dealer at once, or the transportation company which delivered it. Claims for damage sustained in transit must be made upon the Carrier. Save all packing material for inspection by the claim agent who will furnish you with the proper forms and will also give you the necessary instructions for filing a claim. In addition to the Unit, there should be included in the carton the following:

1. INSTRUCTION BOOKLET
2. WARRANTY CARD

To insure proper servicing and to protect your rights under the warranty, be sure to fill in the warranty registration card without delay and mail to the factory.

WARRANTY

This unit has been very carefully inspected and tested at the factory and normally should require no service other than a semi-annual check of the tubes. Each unit is warranted to be free from defects in material and workmanship under normal use and service for a period of 90 days from date of delivery to the original purchaser. If any unit appears to be defective, the factory will repair any unit returned within said 90 days, providing all transportation charges are pre-paid, and which our examination shall disclose to our satisfaction to be defective.

This Warranty does not include free labor, nor is it applicable to any unit which shall have been subject to accident, tampered with, mis-used, abused, or altered in any manner whatsoever. Further, this Warranty shall not apply to any unit which has been connected improperly.

It is recommended that any unit on which service is required, be processed through your dealer wherever possible.

This Warranty is expressly in lieu of all other Warranties, expressed or implied, and of all other obligations or liabilities on our part. We neither assume nor authorize any other person to assume for us any other liability in connection with the products manufactured by Trutone Electronics, Inc.

INSTALLATION:

Because of its attractive appearance, the Amplifier may be placed on a table or a book shelf. Although the unit has ample vents for normal ventilation, sufficient space should be allowed around it to permit free air flow.


Do not put books or other objects on top of the Unit, as this would reduce the ventilation and result in reducing the life of the components and tubes.

When a magnetic phonograph cartridge or tape head is used, the "Mag Phono" - "Mike 2" switch on the rear panel must be set on the "Mag Phono" position; likewise if a microphone is used with the "Mike 2" input, the switch must be on the "Mike 2" position.

Plug the AC line cord in any outlet furnishing 105 to 120 volt, 60 cycle AC.

TRUTONE ELECTRONICS, INC.

LOS ANGELES, CALIFORNIA

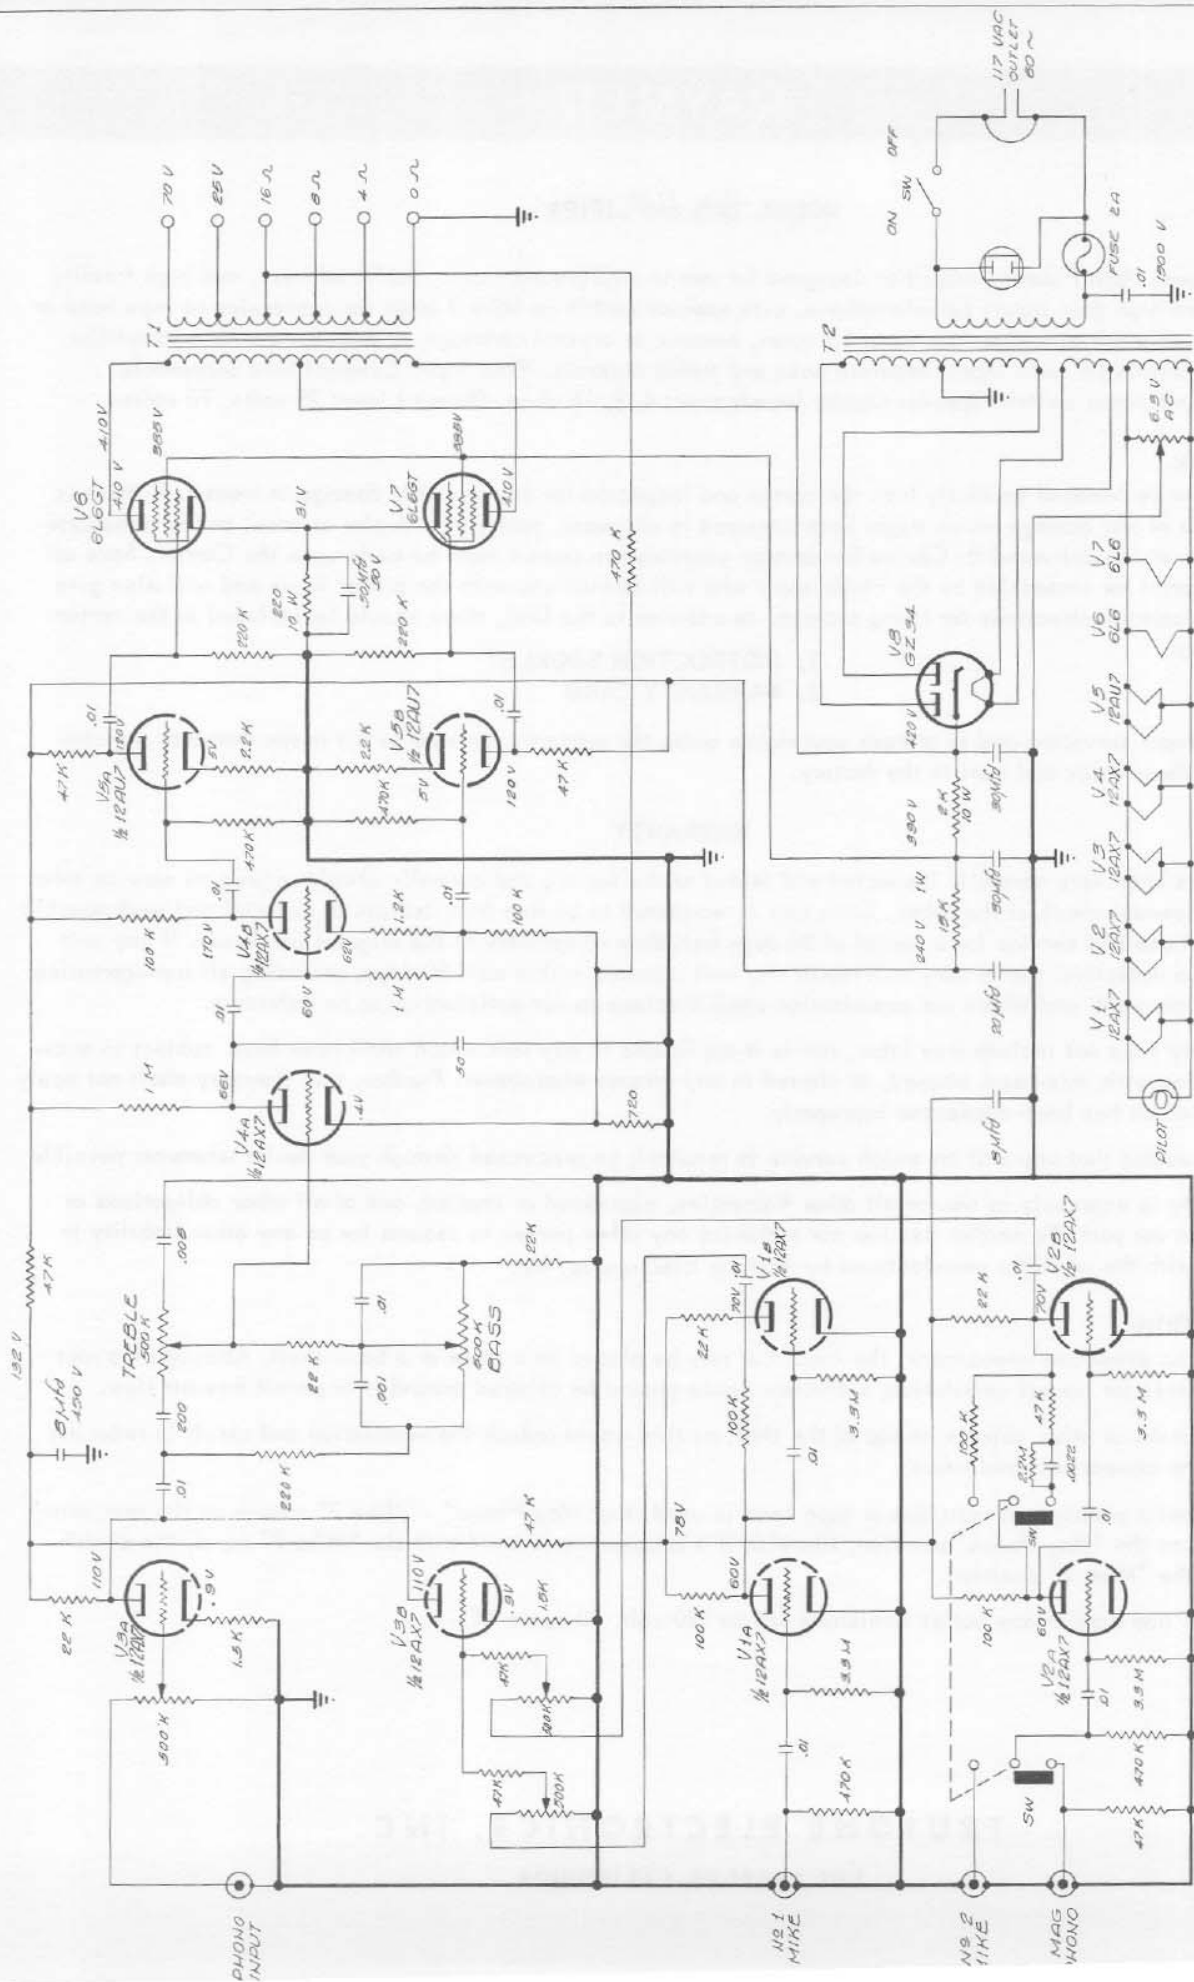

TRUTONE ELECTRONICS INC.
LOS ANGELES CALIFORNIA

MODEL 1835	AMPLIFIER - A.A.
117 VOLTS AC - 60 ~ 140 WATTS	
ENGINEER: HENRY COHLER	- NOV 2 - 1964
APPROVED: PAUL TANTAK	NOT IN REVISION

4. ALL VOLTAGES TAKEN WITH NO SIGNAL INPUT.
5. VOLTAGES TAKEN WITH 50,000 Ω VOLT METER.
6. RESISTORS: Ω = OHMS, K = KILOHMS, M = MEGOHMS.
7. ALL CAPACITORS IN μMF UNLESS OTHERWISE SPECIFIED.

NOTES: